



## VGUARD

## IDEAL FOR SCHOOLS, PLAY AREAS, COMMERCIAL BUSINESS, RETAIL OUTLETS

Posts are complete with our unique pro-fix hanging bracket which makes VGUARD our easiest and quickest fence to install. Many of our customers say their erectors prefer our system as they can install more metres per day and earn more money.

### Standard sizes

*Heights above the standard range can be achieved using a multi-lift system.*

Panels					
Fence height mtrs	Panel size H x W	Wire diameter V x H mm	Number of beams	Post centres mm	Post section RHS
1.8	1733 x 3005	5mm	3	3020	60*60
2.0	2033 x 3005	5mm	4	3020	60*60
2.4	2433 x 3005	5mm	4	3020	60*60
2.4	2433 x 2505	5mm	4	2520	60*60
3.0	3033 x 2838	5mm	4	2853	60 x60

Designed to add an aesthetic appeal to our mesh fencing product range, a high performance system complete with excellent appearance.

### Panels

Manufactured using 5mm wire welded at each intersection, complete with pressed beams creating a strong and durable panel. The mesh aperture consists of a 200 x 50mm mesh spacing providing excellent see through visibility.

### Post system

Standard posts are manufactured from 60 x 60 x 2.5mm Rolled Hollow Section. All posts include threaded inserts, leaving a clean and flush design to the rear face. Our unique hanging clips makes VGuard exceptionally fast to install. Specially designed PROFIX Securing system brackets are used for quick and easy installation. As an optional extra, a slotted 40 x 5mm flat clamp bar can be used for additional security.

### Applications

The VGUARD system is suitable for most applications where general site demarcation is required. Typical examples: schools, public areas, commercial businesses and retail outlets.

### Gates

Standard gates are available or tailored-made to suit your requirements. All gates are supplied with rear hung adjustable hinges, pad-lockable drop-bolts, multi-holed to suit site conditions complete with anti-climb protection. See our gate range for further details.

### Additional security toppings

Hardstaff Barriers supply additional toppings for security fences including razor wire coils, razor wire tape, barbed wire, rotating spikes. We can also prepare fence posts to take electric security fence on the back and work closely with the major electric security fence manufacturers.




\*The specifications shown above are correct at time of printing. Hardstaff Barriers are continually developing their products and reserve the right to change the specifications at any time without notice.

Hillside, Gotham Road, Kingston-on-Soar, Nottingham, NG11 0DF

Tel 0115 983 2304 enquiries@hardstaffbarriers.com

A member of the Hill & Smith Holdings PLC Group

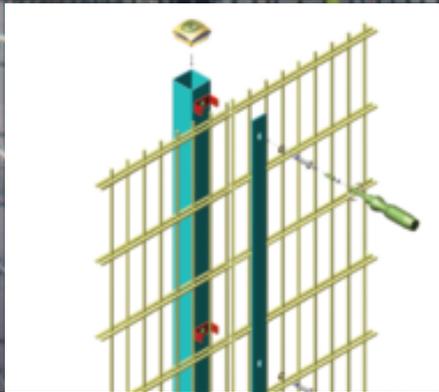

## TWINGUARD

## IDEAL FOR SCHOOLS, PLAY AREAS, COMMERCIAL BUSINESS, RETAIL OUTLETS

Excellent rigid panel system with increased protection against cut through, ideal for use in schools, commercial outlets and a good alternative on industrial sites where other products are not suitable.

A rigid type system providing excellent visual appearance. Its aesthetic look is especially popular with Architects and Specifiers. Manufactured to BS: EN: 1722 Part 14 Cat 2 & 3. security fence manufacturers.

### Panels

Manufactured using 6mm vertical and 2no 8mm horizontal wires welded at each intersection creating a strong and durable panel. The mesh aperture consists of a 200 x 50mm mesh spacing providing excellent see through visibility!

### Post system

Standard posts are manufactured from 60 x 60 x 2.5mm Rolled Hollow Section. All posts include threaded inserts, leaving a clean and flush design to the rear face.

**PROFIX Twin** is a specially designed clamping assembly that secures the panels in place.

## ALSO AVAILABLE IN 6 x 5 x 6 WIRES WHERE COST SAVINGS ARE REQUIRED

### Standard sizes

Fence height (m)	Panel size H x W	Wire diameter H x V x H (mm)	Post centres (mm)	Post Section RHS	Clamp fixing
1.0	1733 x 2505	8*6*8mm	2520	60*60	40*5
1.2	1733 x 2505	8*6*8mm	2520	60*60	40*5
1.8	1733 x 2505	8*6*8mm	2520	60*60	40*5
2.0	2033 x 2505	8*6*8mm	2520	60*60	40*5
2.4	2433 x 2505	8*6*8mm	2520	60*60	40*5
3.0	3033 x 2505	8*6*8mm	2520	60*60	40*5

*Heights above the standard range can be achieved using a multi-lift system.*

*\*Also available with 6\*5\*6mm wires where cost savings are required*

### Applications

The TWINGUARD system is suitable for most applications where general site demarcation is required. Typical examples: schools, public areas, industrial sites and retail outlets.

### Gates

Standard gates are available or tailored-made to suit your requirements. All gates are supplied with rear hung adjustable hinges, pad-lockable drop-bolts, multi-holed to suit site conditions complete with anti-climb protection.

See our gate range for further details.

### Additional security toppings

Hardstaff Barriers supply additional toppings for security fences including razor wire coils, razor wire tape, barbed wire, rotating spikes.

We can also prepare fence posts to take electric security fence on the back and work closely with the major electric security fence manufacturers.



\*The specifications shown above are correct at time of printing. Hardstaff Barriers are continually developing their products and reserve the right to change the specifications at any time without notice.

Hillside, Gotham Road, Kingston-on-Soar, Nottingham, NG11 0DF

Tel 0115 983 2304 enquiries@hardstaffbarriers.com

A member of the Hill & Smith Holdings PLC Group

Telephone 0115 983 2304

enquiries@hardstaffbarriers.com

www.hardstaffbarriers.com