

# REBLOC RB84XEAL\_8

Standard element

**H2**

**W1**

Installation  
**Embedded**



Containment level


**H2** (covers H1, N1, T3, T2, T1)

Working width

**W1** (covers W2, W3, W4, W5, W6, W7, W8)

Impact severity level

**ASI B**

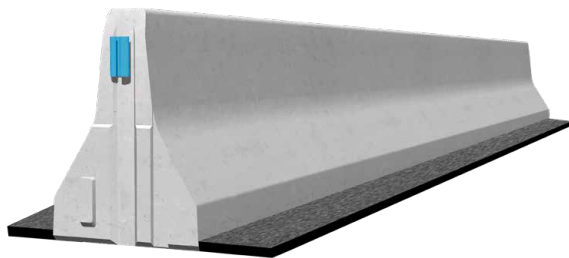

The vehicle restraint system 84XEAL\_8 is embedded 40 mm in asphalt or concrete and is mainly used, where a high containment level is needed within a narrow space.

The installation of short barrier sections is possible due to a short minimum installation length. REBLOC RB84XEAL\_8 is available with drainage openings.

The system is also available free standing with performance data N2/W3.


# REBLOC RB84XEAL-8

Standard element

H2

W1


## Technical data

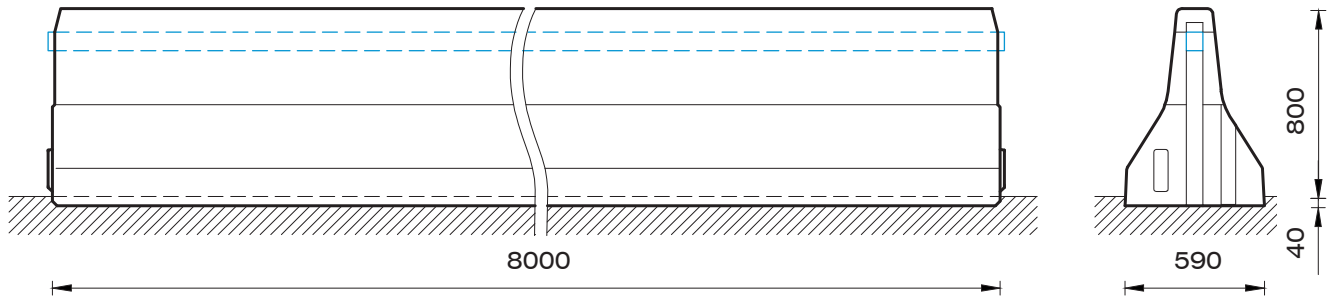

all dimensions in mm

Containment level	H2
Working width	W1
Impact severity level	ASI B
Installation	40 mm embedded in asphalt/concrete
Terminal elements	not necessary, optional available
Dimensions L x W x H in mm	8000 x 590 x 840 mm
Weight/element	4800 kg
Elements/truck (24 t)	5 elements
Minimum installation length	40 m
Curve radius	$r \geq 260$ m, smaller radii on request
Coupling/exposed steel parts	fully integrated, exposed parts hot-dip galvanized
CE certification	✓

## System elements - combinable (optional)



Standard element  
REBLOC 84XEAL\_4T