

# REBLOC RB100SFA\_8

Standard element

Installation

Free standing with  
position securing (anchor)

**H4b**

**W4**



Containment level


**H4b** (covers H3, H2, H1, N1, T3, T2 and T1)

Working width

**W4** (covers W5, W6, W7 and W8)

Impact severity level

**ASI B**

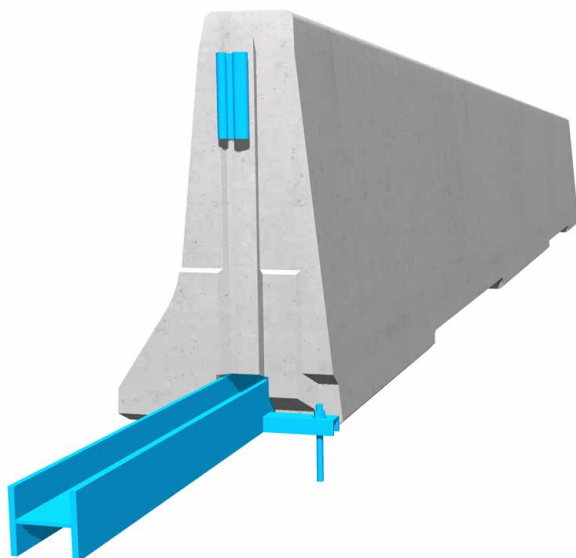

The REBLOC 100SFA\_8 system is ideal for the application on new bridge structures as well as for the refurbishment of existing bridges.

The position securing guarantees the alignment of the elements on the bridge structure. The position securing is installed every 8 m and prevents damages to the bridge structure due to the flexibility of the system.

Dilatation elements for bridge expansion joints were part of the tested system according to European Standard EN1317-1/2. These elements take up movements of the bridge caused by temperature fluctuations.


# REBLOC RB100SFA\_8

Standard element

H4b

W4


## Technical data

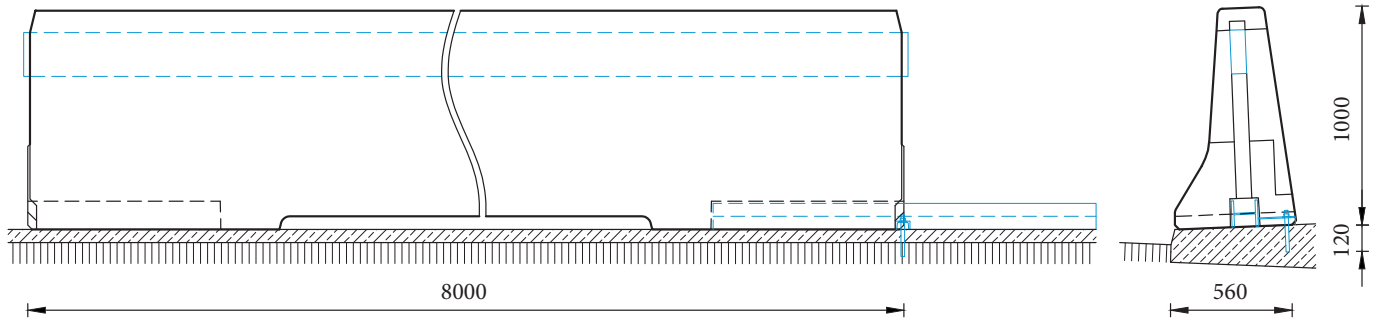


all dimensions in mm

Containment level	H4b
Working width	W4
Impact severity level	ASI B
CE-certification	✓
Installation	free standing with position securing (anchor) (1 x M16 adhesive anchor in concrete/asphalt per element)
Terminal elements	required; REBLOC 100SF_4TR/L (4 x M24 adhesive anchors)
Dimensions L x W x H in mm	8000 x 560 x 1000 mm
Weight/element	6000 kg
Elements/truck (24 t)	4 elements
Minimum installation length	96 m (not including terminal elements)
Curve radius	$r \geq 350$ m, smaller radii on request
Coupling/exposed steel parts	fully integrated, exposed parts hot-dip galvanized

## System elements - combinable



Terminal element  
REBLOC 100SF\_4TR/L



Dilatation element  
REBLOC 100SF\_2.35EXM