

# REBLOC RB120Q\_8

Standard element

**H4b**

**W6**

Installation

**Free standing**



Containment level


**H4b** (covers H3, H2, H1, N1, T3, T2 and T1)

Working width

**W6** (covers W7 and W8)

Impact severity level

**ASI B**

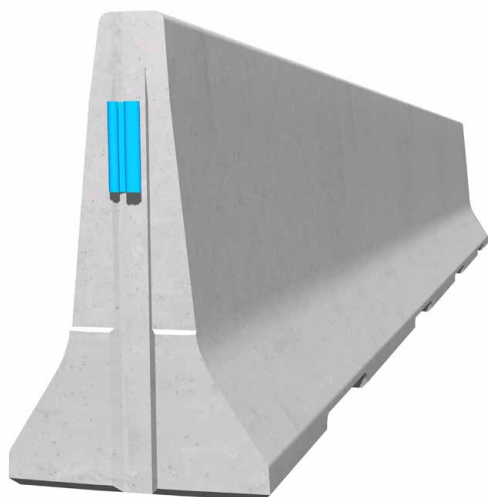

Precast concrete vehicle restraint systems are used for long lasting protection on the central reservation and along the verge. Vehicles deviating from the road are retained or redirected and prevent a dangerous breakthrough onto the opposite carriageway.

In addition to the safety of road users, priorities in the development of our systems are also economic efficiency and return on investment. In addition, a long life as well as low environmental impact are important product features. As with all REBLOC® products, the REBLOC 120Q\_8 has the integrated coupling, which guarantees a high protection against breakthrough and the elements can be quickly connected to each other.


# REBLOC RB120Q\_8

Standard element

H4b

W6


## Technical data

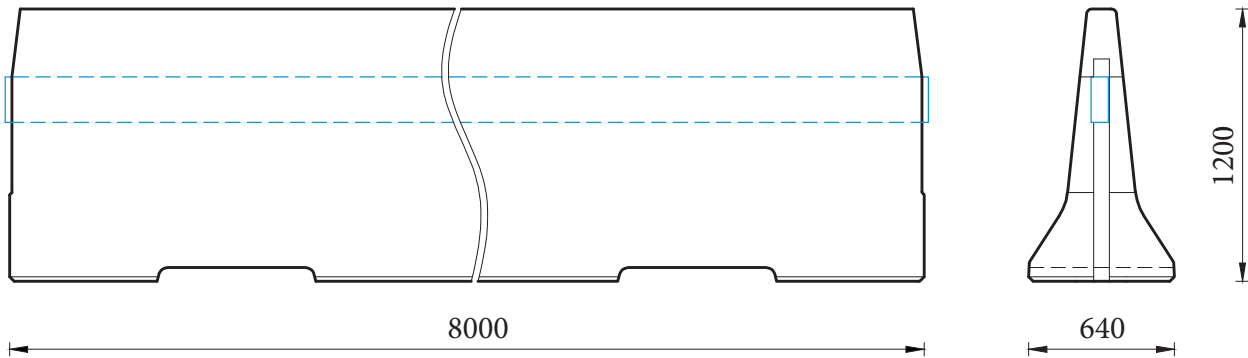

all dimensions in mm

Containment level	H4b
Working width	W6
Impact severity level	ASI B
CE certification	✓
Installation	free standing on asphalt/concrete
Terminal elements	required; REBLOC 120Q_5T (4 x M24 adhesive anchor)
Dimensions L x W x H in mm	8000 x 640 x 1200 mm
Weight/element	6260 kg
Elements/truck (24 t)	3 elements
Minimum installation length	104 m (not including terminal elements)
Curve radius	$r \geq 108$ m
Coupling/exposed steel parts	fully integrated, exposed parts hot-dip galvanized

## System element - combinable



Terminal element  
REBLOC 120Q\_5T  
(inclination 1:5)