

REBLOC RB80L-8

Standard element

Installation

Free standing

H1

W5



Containment level
Working width
Impact severity level

H1 (covers N1, T3, T2 and T1)
W5 (covers W6, W7 and W8)
ASIB



Precast concrete vehicle restraint systems are used for long lasting protection on the central reservation and along the verge. Vehicles deviating from the road are retained or redirected and prevent a dangerous breakthrough onto the opposite carriageway. As a result road users and persons as well as objects at the roadside are well protected.

The integrated, innovative coupling together with a full-length steel tension bar and an ingeniously-designed reinforcement system ensure high security and practicality. The single elements are connected to a strong chain, which safely dissipates the energy caused by vehicle impact.

Thanks to the interlocking coupling, there are no loose parts, which prevent unauthorized removal of pieces and protects fully against vandalism.

 0115 983 2304

 sales@hardstaffbarriers.com | enquiries@hardstaffbarriers.com

 A Division of Hill & Smith Ltd, Hillside, Gotham Road, Kingston-on-Soar, Nottingham, NG11 0DF


REBLOC RB80L-8

Standard element

H1

W5

Technical data

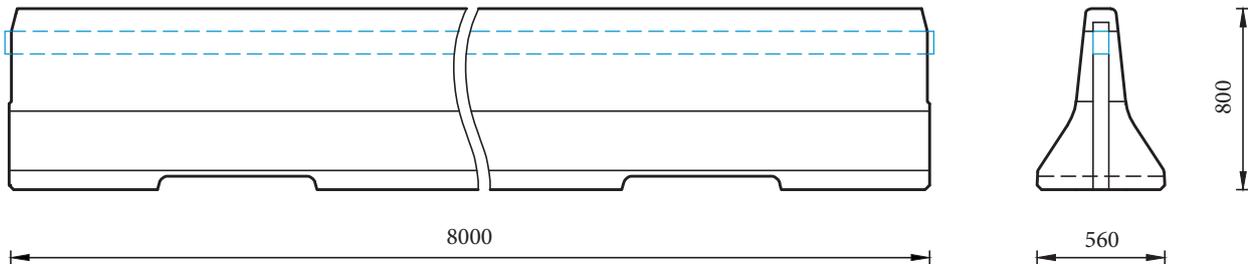

all dimensions in mm

Containment level	H1
Working width	W5
Impact severity level	ASI B
Vehicle intrusion	VI4
Installation	free standing on asphalt/concrete
Terminal elements	required; REBLOC 80H-4T (2 x M20 adhesive anchor) or REBLOC 80H-7T (2 x M20 adhesive anchor)
Dimensions L x W x H in mm	8000 x 560 x 800 mm
Weight/element	4000 kg
Elements/truck (24 t)	6 elements
Minimum installation length	80 m (not including terminal elements)
Curve radius	$r \geq 108$ m, smaller radii in combination with REBLOC 80-4 and REBLOC 80-2
Coupling/exposed steel parts	fully integrated, exposed parts hot-dip galvanized
CE certification	✓

System element - combinable



Terminal element
REBLOC 80H-4T
(inclination 1:5)



Terminal element
REBLOC 80H-7T
(inclination 1:12)