




REBLOC RB185A.1_4_5A

Precast concrete

Installation
Anchored

H4B

W2

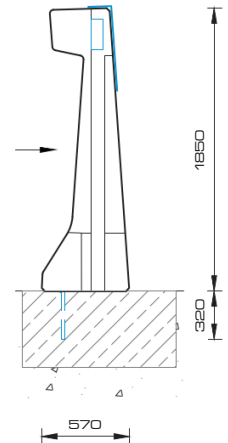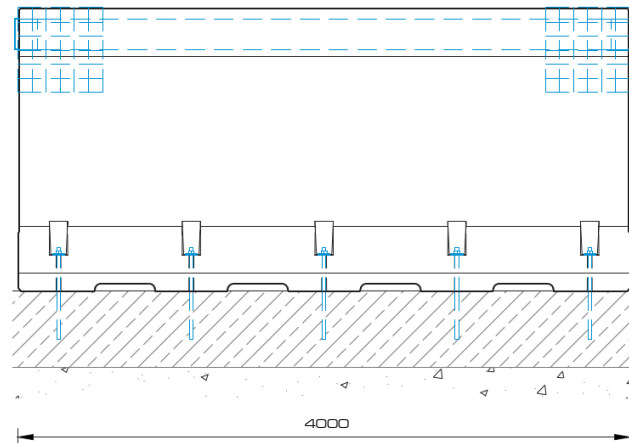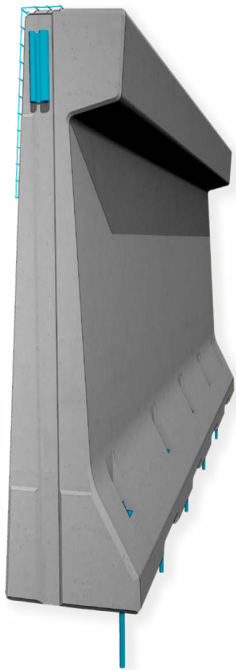

Measurements in MM

Containment level
Working width
Impact severity level

H4B
W2
ASI B

Containment level	H4B
Working width	W2 ($W_N \leq 0.8\text{m}$)
Impact severity level	ASI B
Installation	Anchored (5x adhesive anchor M24 in concrete foundation)
Application	Single-sided
Dimensions L x W x H in mm	4000 x 570 x 1850 mm
Weight/element	approx. 5700 kg
End anchorage	not necessary, optional available
Minimum installation length	32 m (8 elements)
Curve radius	$r \geq 80\text{ m}$, smaller radii on request
Coupling/exposed steel parts	fully integrated, exposed parts hot-dip galvanized
CE certification	✓
Vehicle intrusion	VI2 ($VI_N \leq 0.68\text{m}$)

0115 983 2304

sales@hardstaffbarriers.com | enquiries@hardstaffbarriers.com

A Division of Hill & Smith Ltd, Hillside, Gotham Road,
Kingston-on-Soar, Nottingham, NG11 0DF