

REBLOC RB80AS-8

Standard element

H2


W3

Application
Permanent System

Installation
Anchored soil



Containment level **H2** (covers H1, N1, T3, T2 and T1)
Working width **W3** (covers W4, W5, W6, W7 and W8)
Impact severity level **ASI B**

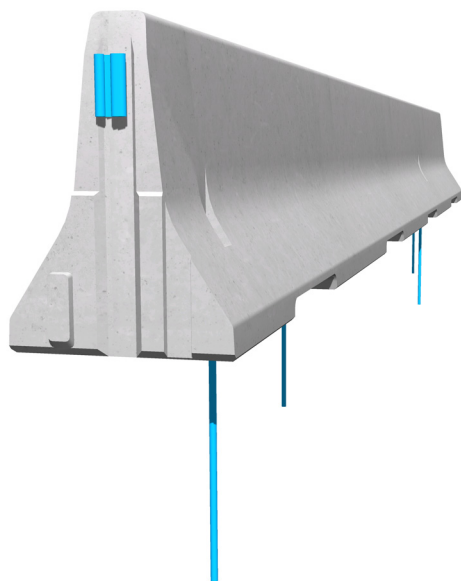

The REBLOC 80AS-8 can be used as a single-row or double-row system for the central reservation as well as for protection along the verge.

The installation is carried out on compacted soil and no additional foundation is necessary. The high safety level is ensured by the anchor pins responsible for a low system movement. The installation is also possible on asphalt after consulting REBLOC®.

The system can also be used without the anchor pins as a free standing, temporary safety barrier (REBLOC SWITCH®).

0115 983 2304

sales@hardstaffbarriers.com | enquiries@hardstaffbarriers.com

A Division of Hill & Smith Ltd, Hillside, Gotham Road,
Kingston-on-Soar, Nottingham, NG11 0DF


REBLOC RB80AS-8

Standard element

H2

W3


Technical data

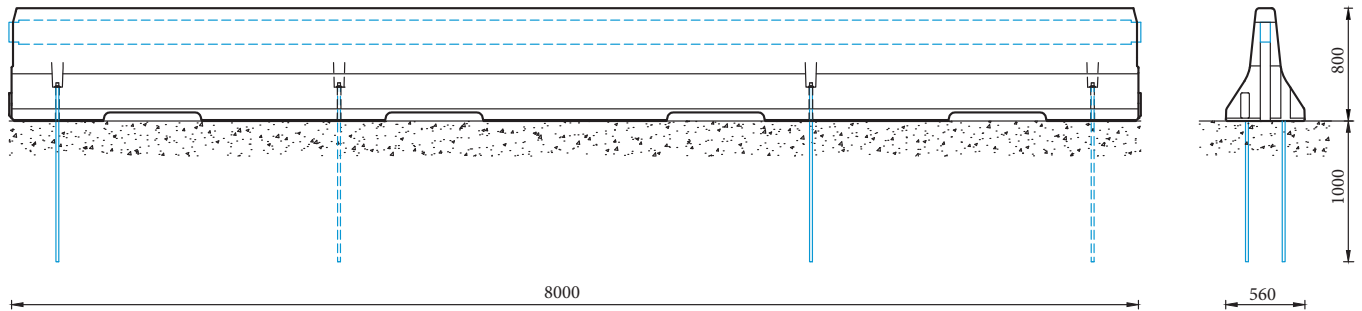

all dimensions in mm

Containment level	H2
Working width	W3
Impact severity level	ASI B
Vehicle intrusion	VI3
Installation	anchored soil (4 x anchor pins REPIN20-1270 in compacted soil per element)
Terminal elements	required; REBLOC 80H-4T (2 x anchor pins REPIN20-1270 or REPIN20-1042 in compacted soil per element)
Dimensions L x W x H in mm	8000 x 560 x 800 mm
Weight/element (approx.)	4000 kg
Elements/truck (24 t)	6 elements
Minimum installation length	64 m (not including terminal elements)
Curve radius	$r \geq 225$ m, smaller radii on request
Coupling/exposed steel parts	fully integrated, exposed parts hot-dip galvanized
CE certification	✓

System element - combinable



Terminal element
REBLOC 80H-4T
(inclination 1:5)

2

0115 983 2304

sales@hardstaffbarriers.com | enquiries@hardstaffbarriers.com

A Division of Hill & Smith Ltd, Hillside, Gotham Road,
Kingston-on-Soar, Nottingham, NG11 0DF